

# REPLACING THE CARBURETOR

For Simoniz 2700PSI Gas Pressure Washer (with Ducar 173cc Gas Engine)

Canadian Tire Product : 039-8055-2

Model Number: UG01

Tools required: Metric #10 wrench, pliers

Part Number: Click link to order [UG01-102-0000 Carburetor](#) or see below contact details.

Difficulty Level (1-3): 2 (Medium)



## WARNING: BEFORE YOU START

Accidental starts can cause serious injury or death. Before performing repair, make sure machine is OFF and disable engine by disconnecting spark plug wire. HOT PARTS CAN CAUSE SEVERE BURNS. DO NOT TOUCH ENGINE WHILE OPERATING, OR JUST AFTER STOPPING. Work on a LEVEL and FLAT surface.




**STEP 1:** The Carburetor is located behind the Air Filter. Remove the Air Filter to access the Carburetor.



**STEP 2:** Lift tab to remove Air Filter Cover.



**STEP 3:** Remove the Air filter

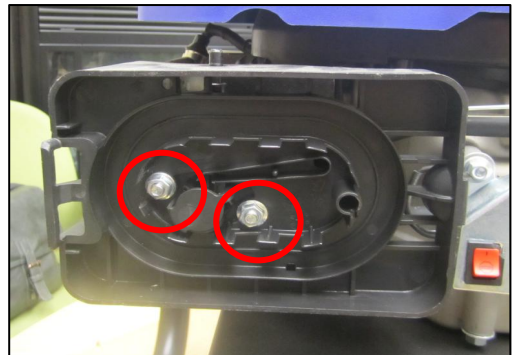

**STEP 4:** Unscrew the 2 nuts from inside the Air Filter box using an M10 wrench. Remove the Air Filter box.

See next page for more steps



To Order Parts go to [www.simoniz.ca](http://www.simoniz.ca); or call 1-866-440-4349

April 2017

# REPLACING THE CARBURETOR (continued)

For Simoniz 2700PSI Gas Pressure Washer (with Ducar 173cc Gas Engine)


Canadian Tire Product : 039-8055-2

Model Number: UG01


Tools required: Metric #10 wrench, pliers

Part Number: Click link to order [UG01-102-0000 Carburetor](#) or see below contact details.


Difficulty Level (1-3): 2 (Medium)

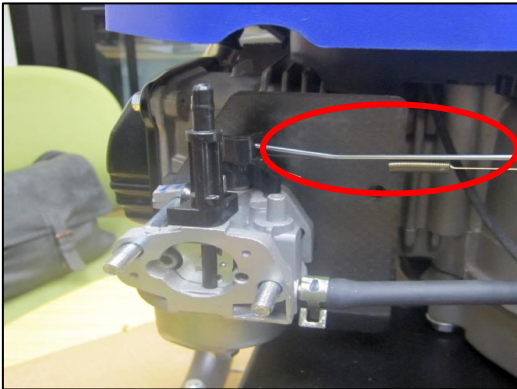


**STEP 5:** Locate the gas throttle wire and tension spring.

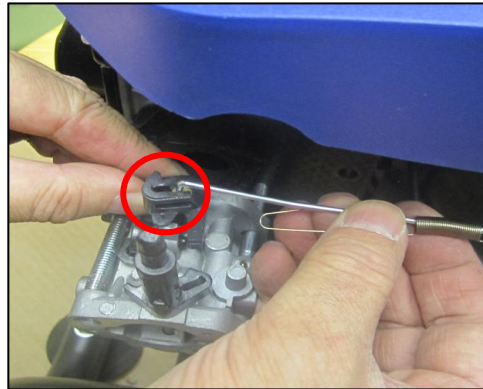

**STEP 6:** Unhook the gas throttle wire and tension spring.

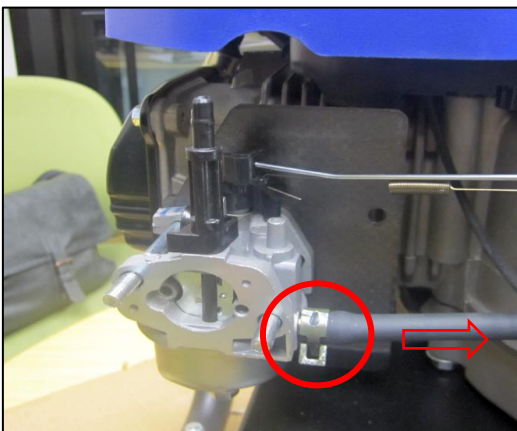

**STEP 7:** Use pliers to squeeze and loosen the Pinch Clamp on the Gas Line. Then gently pull off the Gas Line.

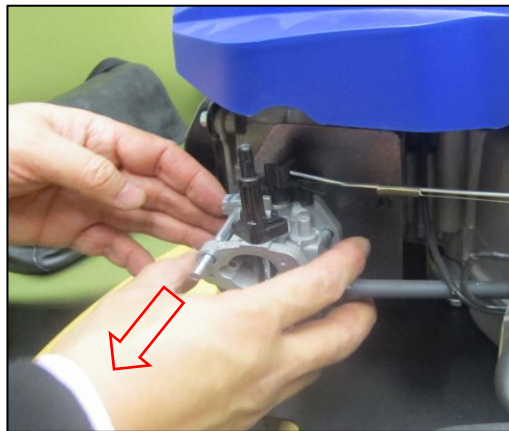

**STEP 8:** Grab onto the Carburetor by hand to remove it. Follow above steps in reverse to install the new Carburetor.