

INSTRUCTIONS FOR REPLACING THE AIR FILTER

For Simoniz 2700PSI Gas Pressure Washer (with Ducar 173cc Gas Engine)

Canadian Tire Product : 039-8055-2

Model Number: UG01

Tools required: none

Part Number: Click link to order [UG01-103-0002 \(Air Filter\)](#), or see below contact details.

Difficulty Level (1-3): 1 (Easy)



WARNING: BEFORE YOU START

Accidental starts can cause serious injury or death. Before performing repair, make sure machine is OFF and disable engine by disconnecting spark plug wire. HOT PARTS CAN CAUSE SEVERE BURNS. DO NOT TOUCH ENGINE WHILE OPERATING, OR JUST AFTER STOPPING. Work on a LEVEL and FLAT surface.




STEP 1: Locate the Air Filter Cover.



STEP 2: Lift tab to remove Cover.



STEP 3: Remove the Air filter.

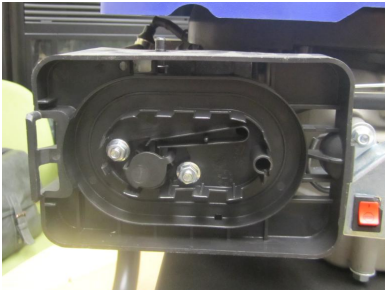

STEP 4:

If Washing Filter: Wash dirty Air Filter with high-flashpoint solvent such as mineral spirits or paint thinner. Squeeze gently to dry and avoid twisting or tearing the Filter. Lastly, dip in clean engine oil, squeeze out excess oil.

If Replacing Filter: To improve the performance of a new Air Filter, wash filter in clean water, then soak the filter in engine oil. Squeeze out excess oil.



STEP 5: Lastly, put cleaned, or new, Air Filter back in place, and return Cover.



IMPORTANT

To prolong the life of your air filter, clean it every 50 hours of use (every 10 hours, under dusty conditions).